
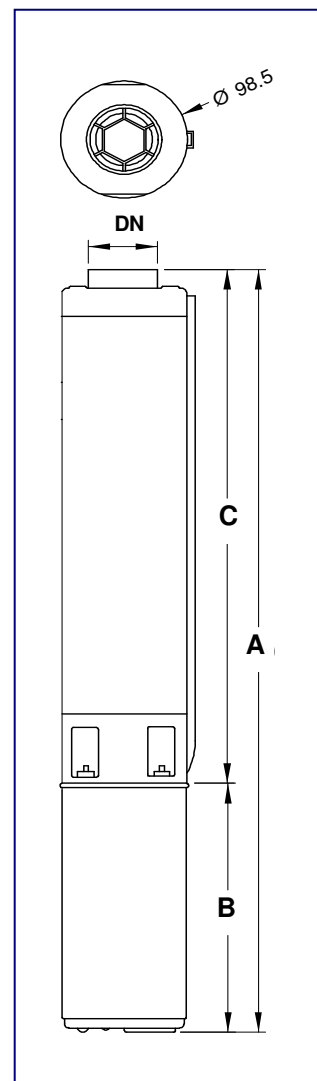


Kapasitetsdiagram ved 2850 rpm
Test etter ISO 9906

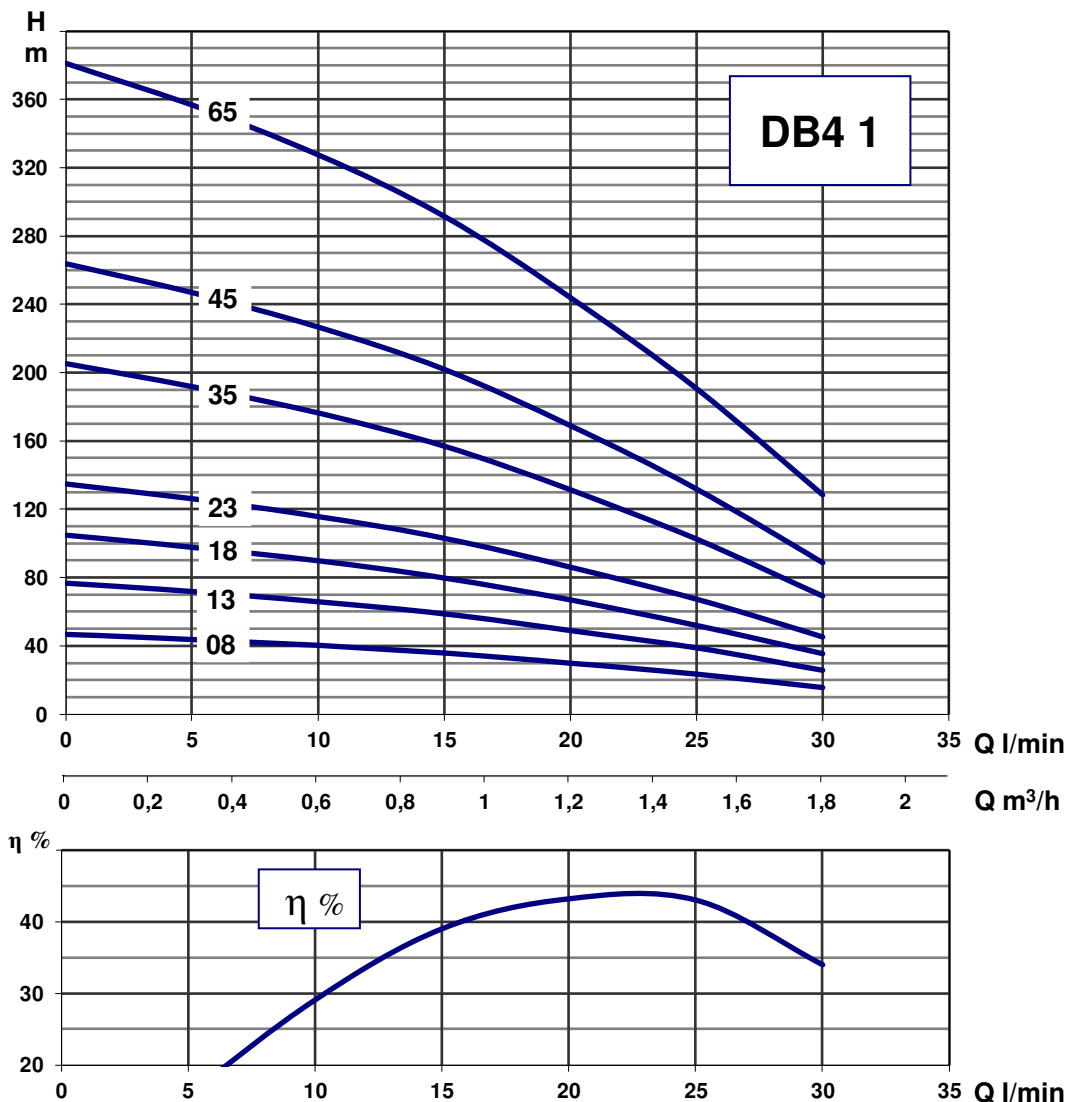

Modell	Spenning Volt	MOTOR		Kondensator		Q - Mengde								Mål			
						m³/h	0	0.3	0.6	0.9	1.2	1.5	1.8	A	B	C	DN
		kW	A	uF	V	l/min	0	5	10	15	20	25	30				
J1 8M	1~220/230	0,25	2,4	12,5	450		47	44	40	36	30	23	16	541	214	327	1 1/4"
J1 13M	1~220/230	0,37	4,1	16	450		77	72	66	59	49	39	26	647	228	419	1 1/4"
J1 13T	3~220/230 3~380/415		1,9 1,1											633	214		
J1 18M	1~220/230	0,55	5,8	20	450		105	98	90	80	67	52	36	806	253	553	1 1/4"
J1 18T	3~220/230 3~380/415		2,8 1,6											781	228		
J1 23M	1~220/230	0,75	7,3	35	450		135	126	116	103	86	67	45	928	283	645	1 1/4"
J1 23T	3~220/230 3~380/415		3,5 2,0											893	248		
J1 35M	1~220/230	1,1	8,6	40	450		205	192	177	157	131	103	69	1215	307	908	1 1/4"
J1 35T	3~220/230 3~380/415		4,9 2,8											1191	283		
J1 45M	1~220/230	1,5	10,5	50	450		264	247	227	202	169	132	89	1473	339	1134	1 1/4"
J1 45T	3~220/230 3~380/415		6,7 3,9											1441	307		
J1 65T	3~220/230 3~380/415	2,2	9,5 5,5				381	357	328	292	244	191	129	2023 2008	437 422	1586	1 1/4"