
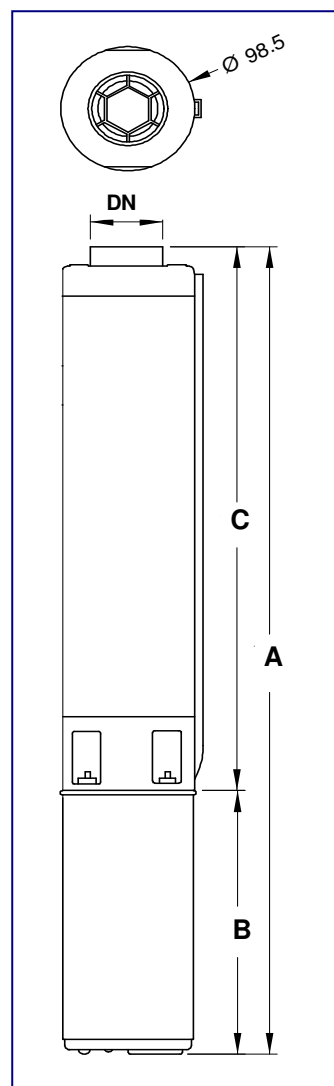


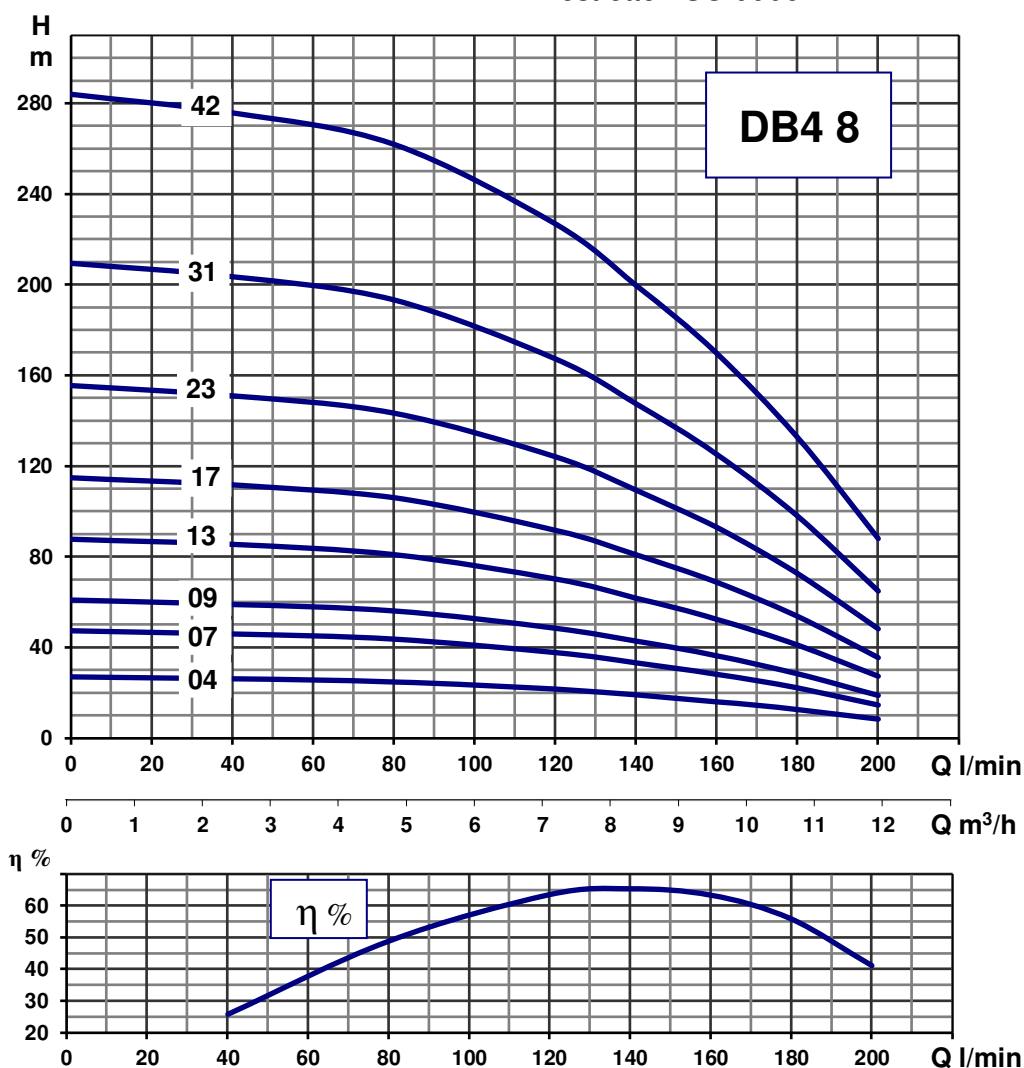

Modell	Spenning Volt	MOTOR kW A	Kondensator uF V	Q - Mengde m³/h 0 2.4 4.8 7.2 8.4 9.6 10.8 12								Mål			
				l/min 0 40 80 120 140 160 180 200								A	B	C	DN
J8 4M J8 4T	1~220/230 3~220/230 3~380/415	0,75 7,3 3,5 2,0	35 450	27	26	25	22	19	16	13	8	581 547	283 248	299	2"
J8 7M J8 7T	1~220/230 3~220/230 3~380/415	1,1 8,6 4,9 2,8	40 450	47	46	44	38	33	28	22	15	695 671	307 283	389	2"
J8 9M J8 9T	1~220/230 3~220/230 3~380/415	1,5 10,5 6,7 3,9	50 450	61	59	56	49	43	36	29	19	787 755	339 307	449	2"
J8 13T	3~220/230 3~380/415	2,2 9,5 5,5		88	85	81	70	62	53	41	27	1046 948	437 339	610	2"
J8 17T	3~220/230 3~380/415	3 13,0 7,5		115	112	106	92	81	69	54	36	1123	394	730	2"
J8 23T	3~220/230 3~380/415	4 17,2 9,9		156	151	143	124	110	93	73	48	1494	543	951	2"
J8 31T	3~220/230 3~380/415	5,5 23,7 12,6		210	204	193	168	148	125	98	65	1884	653	1232	2"
J8 42T	3~380/415	7,5 17,1		284	276	262	227	200	170	133	88	2333	731	1603	2"