Sliding table saw

minimax sc 2c KOMPAKT

Compact design, with swiveling saw blade and high quality sliding carriage made of anodized aluminum

Article number
5504213

Brand
Holzkraft



Availability
No stock available
Information:
Next availability
Expected on calendar week 47/2026

Catalog directory
Woodworking machinery » Circular saw / Sliding table saws » Sliding table saws » minimax sc 2c

Purchase
Minimum 1 pc(s).

Shipping informations

Packaging Metrics		Weights		Delivery		Other	
Length	850 mm	Gross	295 kg	Delivery	Carrier	DualUse	✖
Width	1,680 mm	Net	295 kg	Content	1 pc(s).	SCIP	n/a
Height	1,180 mm					SVHC	No

Root data

Country of origin	EAN	Customs Tariff Number	Quantity unit
Italy	4036351285359	84659120	pc(s).

Video
www.youtube.com/watch?v=mJ8PXwXENIk

MADE IN ITALY

Description

- Cutting plane directly on the saw blade
- Large-dimensioned saw unit made of gray cast iron double-mounted on the cast iron table - guarantee for stability, precision, smooth running and long service life, 6-year Holzkraft warranty on wear of the swivel segments
- Precision-guided format sliding carriage made of aluminium, anodized as standard
- 10-year HOLZKRAFT guarantee on wear of the guide rails of the sliding carriage
- Rip fence with round rod guide and fine adjustment as standard
- Large work table made of milled gray cast iron
- Smooth running and precise cuts
- Standard table widening and table extension make it easy to work with larger workpieces
- Extendable aluminum telescopic fence with angle adjustment and two professional folding fences
- Made in Italy

Manufacturer
SCM Group S.p.A Div. MINIMAX
Via Casale 450, 47826 Villa Verucchio (RN), Italy
minimax@scmgroup.com

Significant Features



Media informations





Rip fence

- With round bar guide and fine adjustment




Saw unit made of gray cast iron

- Attached directly to the cast table in two places
- Can be swiveled precisely using the handwheel and scale for exact miter cuts



Aluminium sliding table

- Equipped with a proven ball contact system Permanently smooth-running
- Guides made of hardened and ground steel, 15% harder than conventional steel
- Guides Pressed in and not glued
- Smooth-running, low-noise and reliable
- 10-year wood power guarantee for wear on the guideways

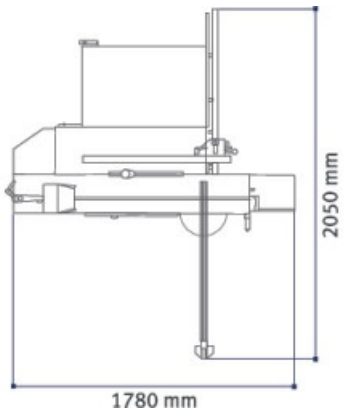



Technical data

Dimensions and weights			
Length (product) approx.	1780 mm	Width/depth (product) approx.	1450 mm
Height (product) approx.	1120 mm	Net weight approx.	276,8 kg
Extraction port			
Extraction port diameter bottom	120 mm	Saw blade protection extraction port diameter	60 mm
Installation information			

Transport width	700 mm	Length	802 mm
Width/depth	615 mm	Space requirement length	3860 mm
Space requiremen width/depth	2750 mm	Explanation about space requirement	The dimensions take into account maximum travel distances or usable lengths
Work area length	1000 mm	Work area width/depth	2000 mm
Explanation about work area	Please add the given dimensions with the required space to obtain the free space recommended for the machine.		
Electrical Data			
Supply voltage	400 V	Mains frequency	50 Hz
Output power (motor power)	4,0 kW	Duty type drive motor	S6
Duty cycle drive motor	40 %		
Sliding carriage and table			
Sliding carriage length	1600 mm	Sliding carriage width	270 mm
Sliding carriage height	124 mm	Table length	1020 mm
Table width	325 mm	Work height	860 mm
Circular saw unit			
Max. cutting width with rip fence	700 mm	Max. cross cut width left from saw blade	1660 mm
Trimming length	1600 mm	Saw blade angle	90 45 °
Max. cutting height 90°	100 mm	Max. cutting height 45°	79 mm
(Main) saw blade diameter	315 mm	Explanation to: (Main) saw blade diameter	Independent of the scoring unit
(Main) saw blade speed	3500 min^{-1}		
Pre-scoring unit			
Diameter scoring saw blade	80 mm	Scoring saw blade speed	7600 min^{-1}

Equipment

Anodised aluminium sliding sizing carriage	✔	Handle for sliding carriage	✔
Saw rip fence	with round rod guide	Stops	Two professional folding stops
Clamp sleigh	✔	Eccentric clamp	✔
Table broadening	✔	Table lengthening	✔
Saw blade cover	✔		

Accessories



Extraction system connection set
120/58 mm

holzkraft Holzbearbeitungsmaschinen

Article number	Availability	Purchase	Price informations
5146060	In stock Immediate delivery	Minimum 1 pc(s).	



Edging and production cut circular saw blade

KSB-BF 315/48

Edging and production cutting circular saw blade with highest quality level especially for industrial applications on stationary machines

Article number	Availability	Purchase	Price informations
5263148	In stock Immediate delivery	Minimum 1 pc(s).	



Cut-to-size alternating teeth circular saw blade

KSB-WZ 315/28


Article number	Availability	Purchase	Price informations
5263128	In stock Immediate delivery	Minimum 1 pc(s).	



Universal swing hood

PSH-U

Article number	Availability	Purchase	Price informations
5510500	Blocked article	Minimum 1 pc(s).	Revoked article



Additional work table on the sledge

Article number	Availability	Purchase	Price informations
5510409	No stock available Information: Next availability Unknown	Minimum 1 pc(s).	



Splitting wedge positively guided for saw blade

for saw blade Ø 250 - 350 mm / 2.8 mm riving knife thickness

Article number	Availability	Purchase	Price informations
5515001	In stock Immediate delivery	Minimum 1 pc(s).	



Trolley for accessories

minimax ease

For the storage of a variety of accessories such as: Dressing fence, telescopic ruler, milling fence, milling unit, etc.

Article number	Availability	Purchase	Price informations
5510010	No stock available Information: Next availability Unknown	Minimum 1 pc(s).	



Digital display of the working width at the rip fence

PA-DIGI-UNI

Article number	Availability	Purchase	Price informations
5516000	In stock Immediate delivery	Minimum 1 pc(s).	

Prices on this data sheet are recommended retail prices, subject to change, in €, plus VAT at the statutory rate, plus packaging, shipping, transport, unloading, assembly and, if applicable, instruction costs. Sales prices of the dealers can deviate. No liability is accepted for printing errors, mistakes or incorrect presentation. Technical and optical changes are reserved. Illustration partly with optional accessories.