

SPECIFIKATIONER

LJUNGBY L13

STEG V MOTOR OG LOCK-UP 157kW



Foto: Lars Malm 2018, 12
790036-78 Rev.1



SUPERIOR PERFORMANCE

- LAVESTE TOTAL OMKOSTNINGER ■ UNIK LÆSSEARM
- LØSNINGER EFTER DINE BEHOV ■ KRAFTFULDE MILJØ MOTORER
- DRIFTSIKKER OG SERVICE VENLIG ■ MARKEDS LAVESTE LYDNIVEAU





SPECIFIKATIONER


LJUNGBY L13

S = standard

O = Tilvalg

DRIVLINJE

Motor	Sisu 66 LFTN
Max effekt [kW/hk]	157/213
Max drejningsmoment [Nm]	945
Transmission	ZF Ergopower WG210
Foraksel	ZF MTL 3085
Bagaksel	ZF MTL 3085
Automatisk differentiale bagaksel	S
Auto/manuel differentiale foraksel	S
To kreds hydraulisk brems	S
Hydraulisk parkeringsbremse	S
Lock-up transmission	S
Vendbar kølervinge	O

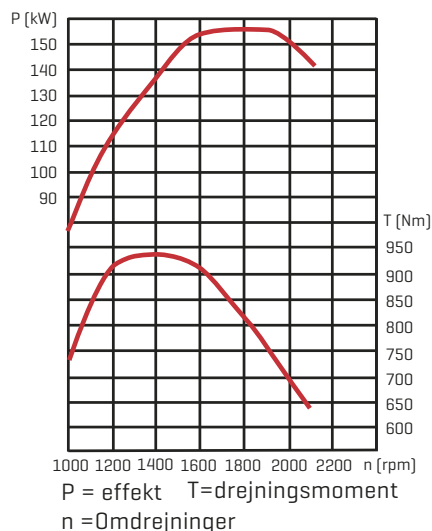

KRAFT OG VÆGT

Brydekraft, Standart skovl [kN]	110
Tippelast [kg]	0° 9300
	40° 8000
	45° 7700
Egen vægt [ton]	12,8-13,6
Standart skovl [m3]	2,4
Letmateriale skovl [m3]	6,0
Tømmergreb [m2]	1,6

HYDRAULIKSYSTEM

Hydraulikpumpe	Parker
Folw [l/min ved 2100 rpm]	304
Tryk[bar]	240
Løftecylinder [mm]	60/115
Vandring løftecylinder [mm]	925
Tiltcylinder [mm]	60/115
Vandring tiltcylinder [mm]	895
Hydraulikkøling	S

STYRESYSTEM

Styrevinkel [grader]	45
Styrecylinder [mm]	40/70
Vandring styrecylinder [mm]	557
Pendling bagaksel [grader]	+/- 15

DIMENSIONER

A	7260
B	3100
C	1535
D	430
E	4180
F	2660
G	1160
H	3300
I	2530
J	2630
R1	4980
R2	5570



ELSYSTEM

Batteri	2 x 12 V, 120 A
Generator	100 A

VOLUMEN INDHOLD

Kølesystem [l]	30
Motor [l]	29
Hydrauliksystem [l]	195
Brændstoftank [l]	210
Ad Blue tank [l]	60

Mål refererer til figuren forinden (mm)

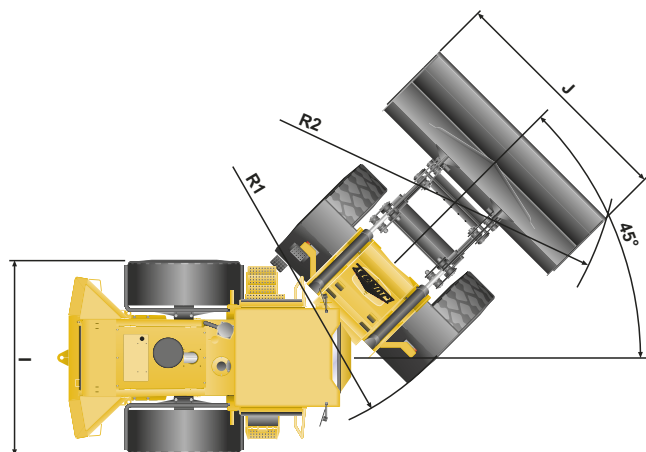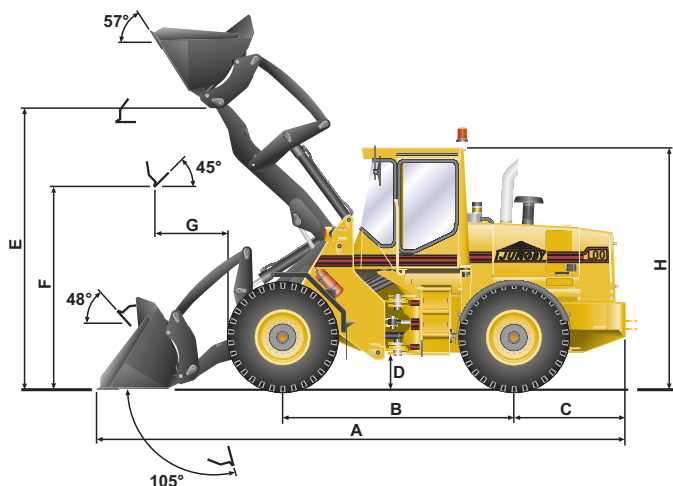

Med forbehold for endringer