



Universal Base Plate Kit

AT: 10/08/2021
VERSION: 7

10mm Aluminium Router Table Insert with Universal Base Plate

The information below is reproduced from the Axminster universal base plate fitting instructions. Hole numbers, screw types and how many required are given for mounting different router models to the base plate.

For advice on models suitable for fitting to the router elevator please contact our experts on **03332 406 406**



Router Chart



BOSCH	GOF1600,1700ACE POF52, 400,500A,600ACE	1	Fx2
	POF800ACE.GOF900A <2003	4	Gx3
	GOF1300ACE,900A>2003	5	Gx3
	GMF1400	0	lx4
	GMF1600CE	19	lx3
CMT	CMT1E,CMT2E	1	Fx2
DEWALT	DW613,614,615,620,621, DW625EK.629	1	Fx2
DRAPER	R1900V	2	Fx3
	PT1200V	1	Fx3
ELU	OF97(E),MOF177(E),131,98, MOF77,96(E) MK2,69'	1	Fx2
FELISATTI	R346EC	1	Ex2
FESTOOL	OF2000(E)	7	Ex3
	OF1E,900(E),1000(E),OF1010	8	Bx4 & Ax3
	OF1400 EBQ-Plus	23	Hx2

• 10mm Aluminium Insert with Universal Base (Code 502748)

FREUD	FT1000(E),2000E	2	Fx3
HITACHI	M8(V)	10	Dx4
	M12V,M12SA	11	Dx4
	TR12	11-12	Dx4
HIKOKI	M12VE	11	Dx4
MAFELL	L050E	8	Bx4
MAKITA	3620,3612BR,3600B	13	Dx2
	3612(C)	14	Ex2
	RP0910,1110C	1	Fx2
	RP2301FCX	22	Bx4
PRO	CLM1250R >11/03,CLM2050R	1	Fx2
PERLES	OF808(E)>1999',2-808(E), OF9(E)	1	Hx2
PEUGEOT	DEF570E.DF55E	15	Ex2
RYOBI	RE600N,R600N,RE601, ERT1500V	13	Dx2
	R500,502	16	Ax4
	R150,151,RE120,155K	15	Ex2
SKIL	1835U.1875U1	17	Cx3
TREND	T3,T4,T5,T5MK2',T9,T10,T11, T7EK	1 10	Hx2 Ax2
TRITON	MOF001,TRA001	21 2 5	1/4" UNC 6.35mm
WADKIN	R500	16	Ax4

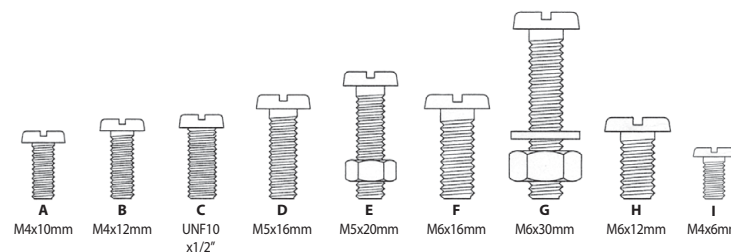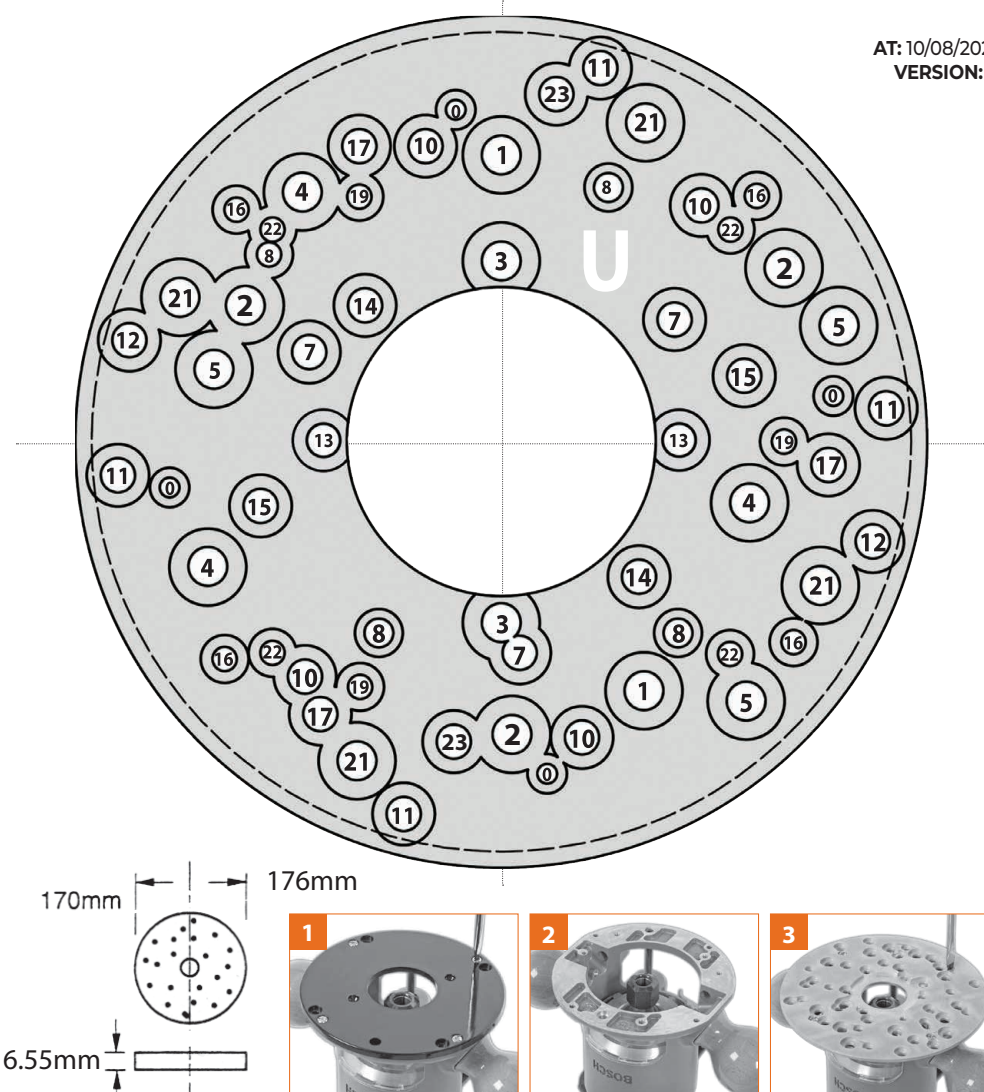

Axminster Tools, Axminster, Devon, EX13 5PH

axminstertools.com/ujk