
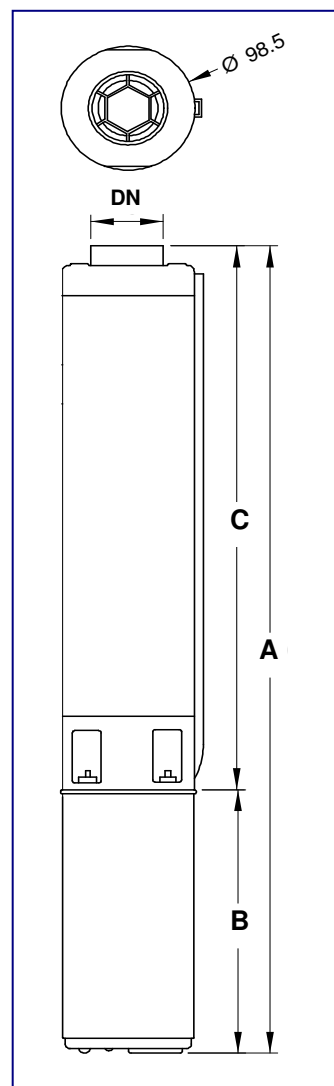


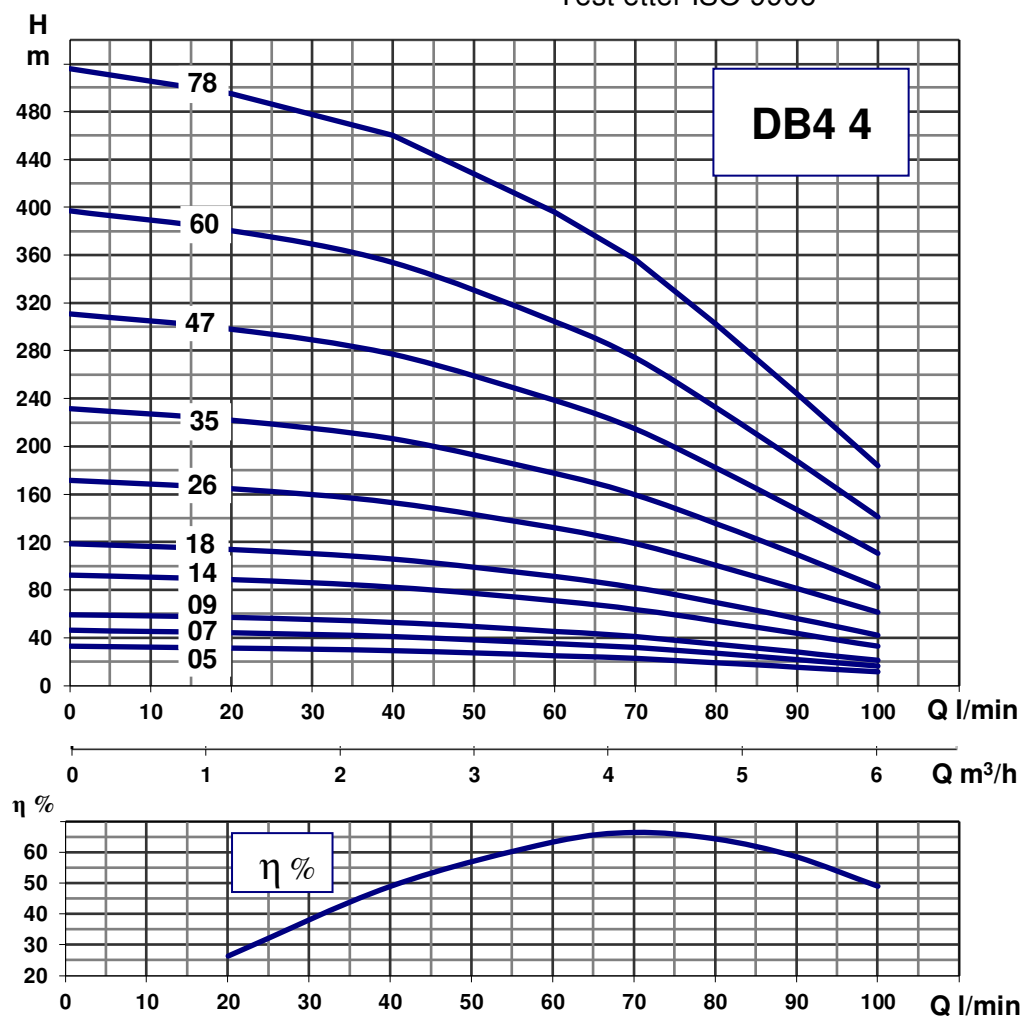

Modell	Spenning Volt	MOTOR		Kondensator		Q - Mengde								Mål			
						m ³ /h	0	1,2	2,4	3,6	4,2	4,8	5,4				
		l/min	0	20	40	60	70	80	90	100	A	B	C	DN			
		H - Trykkehøyde (mvs)															
J4 5M	1~220/230	0,37	4,0	16	450	33	32	29	25	23	19	16	12	517	228	289	1 1/4"
J4 5T	3~220/230		1,9														
	3~380/415		1,1														
J4 7M	1~220/230	0,55	5,9	20	450	46	44	41	36	32	27	22	17	586	253	333	1 1/4"
J4 7T	3~220/230		2,8														
	3~380/415		1,6														
J4 9M	1~220/230	0,75	7,3	35	450	60	57	53	46	41	35	28	21	659	283	377	1 1/4"
J4 9T	3~220/230		3,5														
	3~380/415		2,0														
J4 14M	1~220/230	1,1	8,6	40	450	93	89	83	71	64	54	44	33	793	307	487	1 1/4"
J4 14T	3~220/230		4,9														
	3~380/415		2,8														
J4 18M	1~220/230	1,5	10,5	50	450	119	114	106	91	82	70	56	42	954	339	616	1 1/4"
J4 18T	3~220/230		6,7														
	3~380/415		3,9														
J4 26T	3~220/230	2,2	9,5			172	165	153	132	119	101	81	61	1228	437	792	1 1/4"
	3~380/415		5,5														
J4 35T	3~220/230	3	13,0			232	222	206	178	160	136	109	83	1508	477	1031	1 1/4"
	3~380/415		7,5														
J4 47T	3~220/230	4	17,2			311	298	277	239	215	182	147	111	1879	543	1336	1 1/4"
	3~380/415		9,9														
J4 60T	3~220/230	5,5	23,7			397	381	354	305	274	232	188	142	2315	653	1663	1 1/4"
	3~380/415		12,6														
J4 78T	3~380/415	7,5	17,1			516	495	460	396	356	302	244	184	2830	731	2100	1 1/4"